

# DINO

## TECHNICAL PARAMETERS AND EQUIPMENT

Arena | Dino | Polo | Divan | Rondo | Master

Round commercial spa Dino complies with the German standard DIN 19643-1: 2012-12, fulfilling the strictest criteria for public operations in Europe. Dino is deeper than similar model Polo, which contributes to larger capacity, which is 6 - 7 persons.

The massage is provided by water and air jets located on the spa periphery. Dino is suitable for the most demanding public facilities, such as aqua parks, hotels, and other wellness facilities.



### MODEL SPECIFICATION

Shell size	Ø 256 × 100 cm
Frame size	Ø 256 × 116 cm
Water volume	1630 l
Dry weight	250 kg
Filled weight	1880 kg
MassiveShell Construction color range	yes 2
Adjustable installation frame	yes
PU insulation	yes
Total seating	6-7
Outflow – overflow channels	yes
Number of outfalls	4
Bottom outlet / sand filtration discharge	yes

### MASSAGE

Total number of jets	44
Water jets	30
Air jets	14

### CONTROL

USSPA iNtelligSmart® electropack	yes
ISM® control system	yes
Control keypad on electropack	yes
Control via PC application (connection to local LAN needed)	yes
Selfdiagnostics with optional protocol	yes
Control of lifetime of selected components	yes
iNcontrol piezo buttons	3


### TECHNOLOGY

Pump 1	1,5 kW + 3 HP
Commercial air blower	yes
Sand filtration	yes
Equalising tank	yes
Automatic water level sensor	yes
Automatic water refilling	yes
Heater	9 kW Titanium Coil
UV lamp	yes
Automatic chemistry dosing	yes
Flowmeter	yes
Light	yes

### OTHER STANDARD EQUIPMENT

Handrail	1 / stainless
----------	---------------

We will be happy to present you with further options of accessories and services. Visit our showrooms.

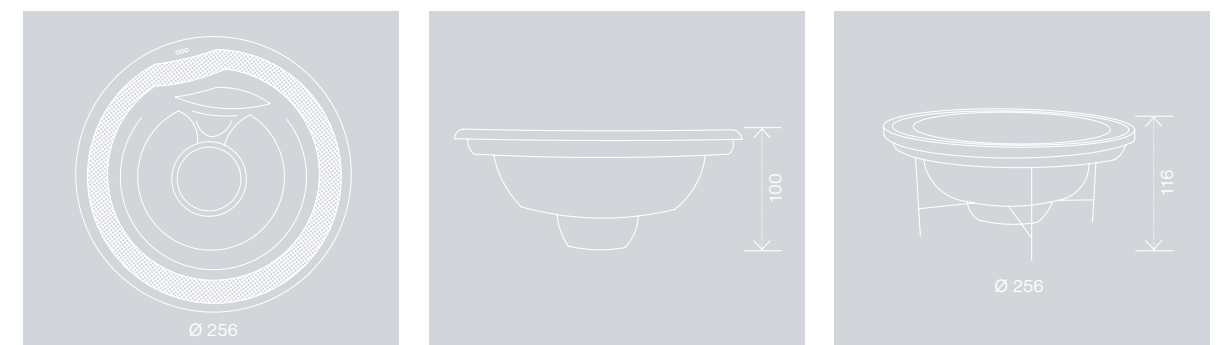

### Electrical connections:

- for the massage technology connection - CYKY 5C x 2,5 circuit breaker 20 A char. "C", Current protector I $\Delta$ n = 0,03 A in the spa ground plan.
- for the filtration technology connection - CYKY 5C x 4 circuit breaker 25 A char. "C", Current protector I $\Delta$ n = 0,03 A in the filtration technology area.

